


GEMINI



Gemini is our premier panel. Perfect for installation and rental applications, it can be flown, wall mounted or ground supported and is front serviceable. Gemini contains convex and concave curving locks providing the ability to add dimension to your display.

The Gemini panel comes in standard pitches of 1.9mm, 2.9mm, 3.9mm indoor and 3.9mm outdoor. It ships standard with Neutrik connectors and Novastar A8s processing system or the option to upgrade panels to Brompton R2. Let Gemini make your LED Display a star!

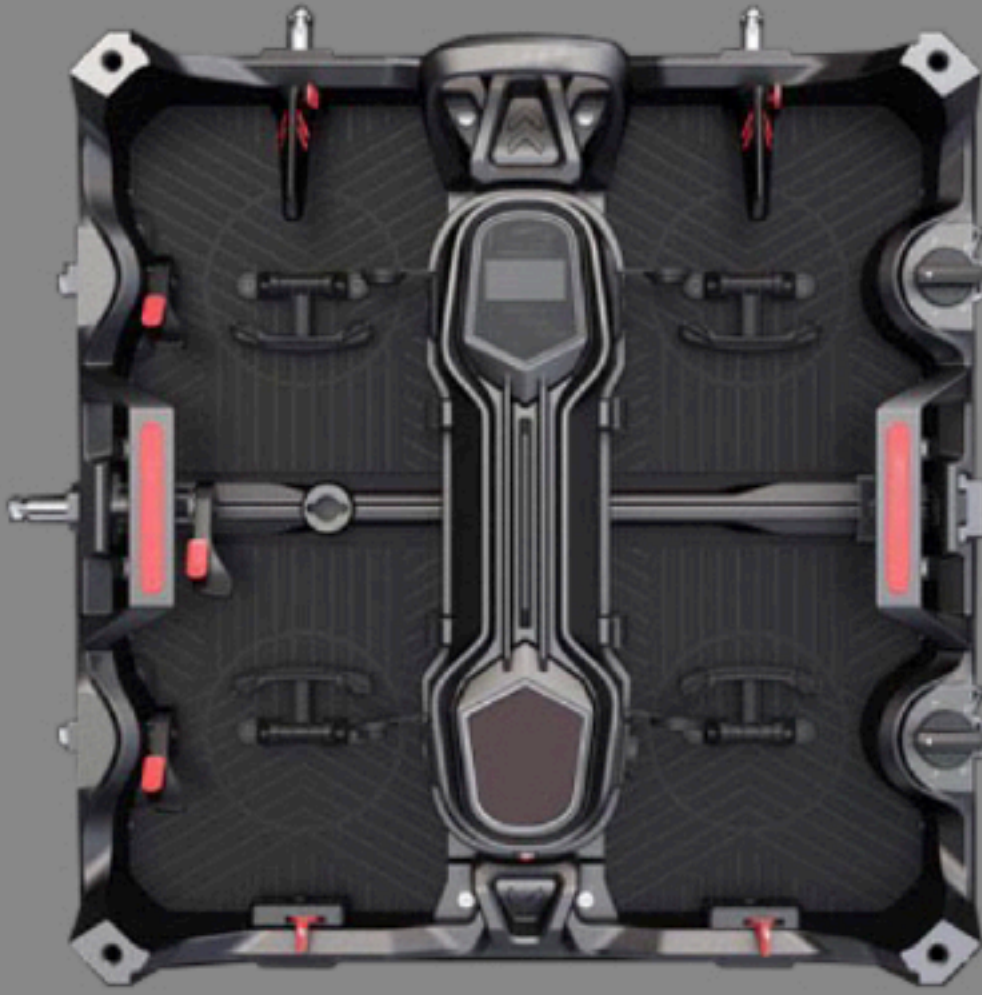

OUTDOOR

Pixel Pitch-mm	3.9
Viewing Angle - °	H140°/V100°
Brightness - Nits	5500
Color Depth-Bits	14
Refresh Rate	≥2880Hz
Module Size(mm)	250x250
Module Pixels	64*64
Cabinet Size(mm)	500x500x98
Cabinet Pixels	128*128
Cabinet Weight (kgs/lbs)	9
Voltage	110/220 AC
Max. Power Consumption W/m ²	710
Max. Power Amps W/m ² AC 110V	6.5
Avg. Power Consumption W/m ²	249
Avg Power Amps W/m ² AC 110V	2.3
Service Access	Front&Rear
IP Grade Front/Rear	IP65
Lifetime(Normal Temp)	≥100000H

ACCESSORIES & UPGRADES

- 500mm Header / Footer Bar
- 1000mm Header / Footer Bar
- Ground Support Kits
- Ground Support Feet
- Adjustable Landing Feet
- Road Cases For LED Panels
- Road Cases for Header / Footer Bars
- Custom Branding for Panels and Cases
- Upgradable to Brompton Technology Processing
- Custom Touring Carts

